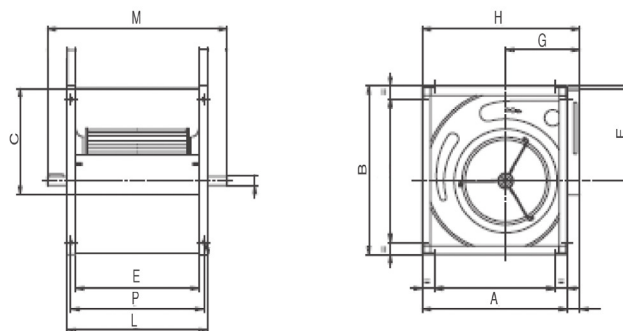


## CENTRIFUGAL FANS

**AT SERIES - CUBIK VERSION**

NICOTRA | Gebhardt

*Double inlet*

TYPE	KW*	rpm*	Ø SHAFT	A	B	C	E	G	H	L	M	P	CODE
7/7	3	2600	20	285	337	208	232	153	321	272	400	254	<b>0402320**</b>
9/7	3	2500	20	349	399	262	232	185	385	272	400	254	<b>0402321</b>
9/9	3	2100	20	349	399	262	298	185	385	338	460	320	<b>0402322</b>
10/8	3	2500	20	395	455	289	265	203	431	305	425	287	<b>0402323</b>
10/10	4	2000	20	395	455	289	331	203	431	371	490	353	<b>0402324</b>
12/9	5.5	2000	25	461	533	341	309	230	497	365	495	339	<b>0402325</b>
12/12	5.5	1500	25	461	533	341	395	230	497	451	585	425	<b>0402326</b>
15/11	5.5	2000	25	539	621	404	373	264	575	429	585	403	<b>0402327</b>
15/15	5.5	1200	25	539	621	404	471	264	575	527	685	501	<b>0402328</b>
18/13	7.5	1200	25	654	751	478	430	314	690	506	666	470	<b>0402329</b>
18/18	7.5	1100	25	654	751	478	557	314	690	633	790	597	<b>0402330</b>

\*Maximum installable values for the coupling motor (not included).

\*\*SC version

Note: Twin version by request

## DESCRIPTION:

Double inlet centrifugal fans with belt drive and support chassis.

Bearings in rubber vibration supports

Made of galvanised plating

## APPLICATIONS:

- Ventilating sections of air treatment units
- Cooker hoods
- Ventilating boxes
- Evaporating sections of refrigeration units