


# SINGLE-PHASE MOTORS

## 2-POLE

Insulation class F, 230V

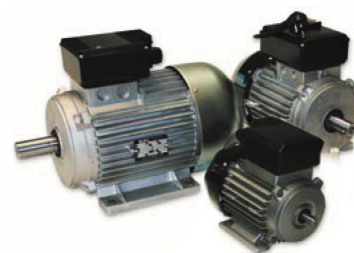

KW	HP	TYPE	Ø SHAFT	I	I.C.C.	η%	R.P.M.	COS. ϕ	CONDENS. 450V	MP/MN	KG	SHAPE	CODE
0,18	0,25	63	11	1,3	2,9	60	2750	0,98	10	0,75	4,5	B3	BM632025B3
												B5	BM632025B5
0,25	0,33	63	11	1,9	4,2	60	2750	0,98	14	0,7	5	B3	BM632033B3
												B5	BM632033B5
0,37	0,5	71	14	2,3	7,2	60	2780	0,98	14	0,7	7	B3	BM712050B3
												B5	BM712050B5
0,55	0,75	71	14	3,3	9,5	60	2780	0,98	12.5	0,7	7.5	B3	BM712075B3
												B5	BM712075B5
0,75	1	80	19	5	19,8	62	2750	0,99	31.5	0,92	10	B3	BM802100B3
												B5	BM802100B5
1,1	1,5	80	19	7,5	26,8	71	2750	0,97	35	0,88	11	B3	BM802150B3
												B5	BM802150B5
1,5	2	80	19	9,3	29,4	73	2750	0,98	40	0,66	12	B3	BM802200B3
												B5	BM802200B5
1,5	2	90S	24	9,6	31	73	2760	0,98	40	0,88	13,5	B3	BM90S2200B3
												B5	BM90S2200B5
1,8	2,5	90L	24	12	27,5	84	2820	0,99	55	0,71	16	B3	BM90L2250B3
												B5	BM90L2250B5
2,2	3	90L	24	13.6	49,4	71	2810	0,95	60	0,889	16.5	B3	BM90L2300B3
												B5	BM90L2300B5

By request, available in B14 format the same price as the B5 - remember to communicate the code: B14.